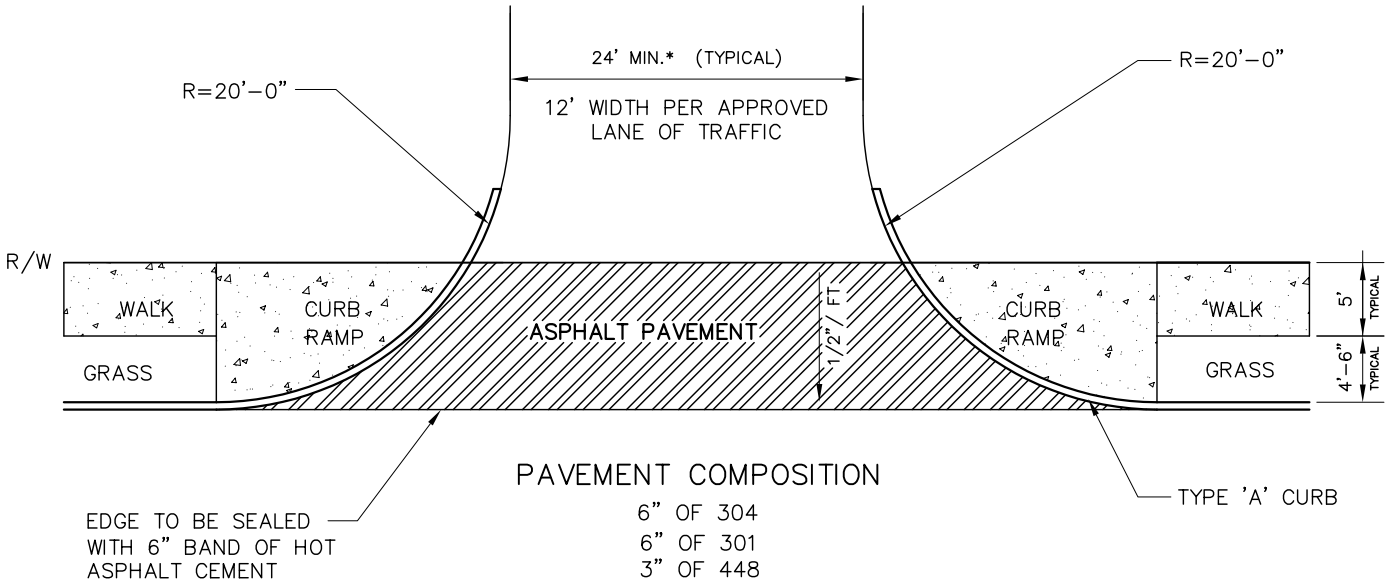

NOTES:

CONDITIONS WHICH MAY WARRANT VARIATIONS FROM THESE SPECIFICATIONS MUST BE APPROVED BY THE ENGINEER.

CONCRETE SHALL BE ODOT CLASS C

CONCRETE WALK THICKNESS SHALL BE 6" IN THE RADIUS AREA.

SPACING OF FALSE OR REAL JOINTS IS NOT TO EXCEED 5'

EXPANSION JOINTS SHALL BE PLACED AS PER ITEM 608.03

CURB MUST BE CONSTRUCTED SEPARATELY FROM THE 6" SIDEWALK

CURB RAMP MUST BE CONSTRUCTED AS PER STANDARD DRAWING CR-1

CONCRETE WALK AND TYPE 'A' CONCRETE CURB MUST BE CONSTRUCTED AS PER STANDARD DRAWING CU-1

TYPE 'A' CURB SHALL BE TAPERED FROM 6" TO 0" IN HEIGHT TO 5' BEHIND THE RIGHT OF WAY LINE IF NOT CONTINUING CURB ON SITE.

* MAXIMUM WIDTH SHALL BE APPROVED BY THE CITY ENGINEER

CITY OF SPRINGFIELD, OHIO
DEPARTMENT OF ENGINEERING

COMMERCIAL DRIVE DETAIL

DATE
OCT 04

STANDARD DRAWING DW-2

APPROVED_____CITY ENGINEER